Pökelmaschine PM 75

- Neuer robuster Pökelautomat für Gewerbe- und Industriebetriebe
- Ganze Maschine in schwerer, massiver Chromnickelstahl-Konstruktion
- Nadelkopf mit luftgefederten Nadeln mit 4,5 mm / 3,0 mm Durchmesser
  Einstichspitze 3,0 mm / 2,0 mm, einfach auswechselbar
- Zum Spritzen von Produkten mit und ohne Knochen
- Patentierte, druckluftgesteuerte Abstreifvorrichtung ohne Anpressdruck auf das Produkt, für optimale Lakeaufnahme und -verteilung
- Stufenlos regulierbarer Lakedruck
- Rostfreie Zentrifugalpumpe, Leistung max. 220 l / min. Druck manuell verstellbar von 0,2 bis 3,0 bar, sep. Motor 5,5 KW
- Glycerin Manometer zur Druckanzeige
- Kurbelantrieb mit 2-stufigem Getriebemotor, 10 / 20 Hübe / min.
- Patentiertes Kunststoffgliederband mit Edelstahlachsen, 380 mm
- Ganze Transporteinheit werkzeuglos herausnehmbar
- Zwei Vorschubstufen: 60 mm & 120 mm pro Hub
- Integriertes Reinigungssystem zum Spülen des gesamten Injektionskreislaufes.

PM 75 pickle injector

- Sturdy new pickle injector for automated production.
- Rugged, heavy-duty stainless-steel construction throughout.
- Needle head of air-cushioned needles in 4,5 mm / 3.0 mm diametrers with 3.0 mm / 2.0 mm injection tips, easy to remove and replace.
- For injection of bone-in and boneless products.
- Patented pneumatically stripper bar avoids squeezing product to assure consistently optimal brine uptake with even distribution.
- Infinitely variable brine pressure.
- Rustproof centrifugal pump with max. capacity 220 l /min., Pressure adjusts manually from 0,2 to 3,0 bar, seperate 5.5 KW motor
- Crank drive with 2-speed motor, 10 / 20 strokes /min.
- Patented conveyor system featuring nylon segments and stainless steel pivots, 380 mm.
- Two belt advance modes: 60 mm & 120 mm per stroke.
- Integrated cleaning system to flush entire injection circuit clean.

Fleischerei MASCHINEN
DORIT DFT GmbH
www.dft-gmbh.de

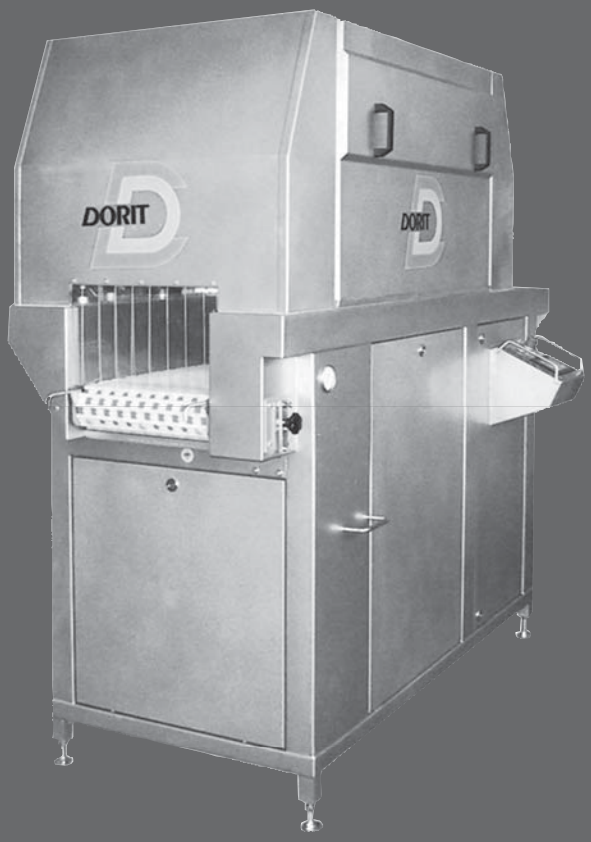

Dorit-DFT Fleischereimaschinen GmbH

Andreas-Bechdolf-Str. 1
D-73479 Ellwangen

Telefon
+49 (0) 7961 93 39 40

Fax
+49 (0) 7961 93 39 415

eMail
schmid@d-f-t.net

Fleischerei MASCHINEN

DORIT DFT GmbH

www.dft-gmbh.de

Technische Daten / Technical data

			PSM 100 3.0-ZD	PSM 100 4.5-ZD	PSM 182 3.0-ZD	PSM 200 3.0-ZD	PSM 200 4.5-ZD	PSM 364 3.0-ZD
Einzelnadeln	Single needles		100	100	182	200	200	364
Nadelköpfe	Needle heads		1	1	1	2	2	2
Nadeldurchmesser	Needle diameter	mm	3,0	4,5	3,0	3,0	4,5	3,0
Anzahl Hübe pro Minute	Strokes per minute	mm	10 & 20	10 & 20	10 & 20	10 & 20	10 & 20	10 & 20
Bandvorschub pro Hub	Belt advance per stroke	mm	60 & 120	60 & 120	60 & 120	60 & 120	60 & 120	60 & 120
Max. Produkthöhe	Max. product height	mm	200	200	200	200	200	200
Wannenbreite	Channel width	mm	411	411	411	411	411	411
Max. Stundenleistung je nach Produkt	Max. capacity per hour depending on product	kg	ca. 4000	ca. 4000	ca. 4000	ca. 6000	ca. 6000	ca. 6000
Max. Einspritzmenge pro Durchgang	Max. injection rate in one pass	%	70 - 100	70 - 100	70 - 100	70 - 100	70 - 100	70 - 100
Zentrifugalpumpe ZP-220	Centrifugal pump ZP-220		√	√	√	√	√	√
Mechanischer Antrieb/Frequenzumwandler	Mechanical drive/Frequency converter		√	√	√	√	√	√
Elektronisch gesteuerter Ketten-Vorschub	Electronically operated chain drive belt advance		√	√	√	√	√	√
Pneumatisch/hydraulisch gest. Nadeldruck	Pneumatically/hydr. operated needle pressure		√	√	√	√	√	√
Pneumatisch gesteuerter Abstreifdruck	Pneumatically controlled stripper blocks		√	√	√	√	√	√
Patentiertes Kunstoff-Gliederband	Patented neoprene food-quality conveyor belt		√	√	√	√	√	√
Integrierter Rücklauffilter und Saugfilter	Integrated return-flow and suction filter		√	√	√	√	√	√
Option: Computersteuerung	Option: Computerised control		√	√	√	√	√	√
Motorendaten:	**Electric motors:**							
Nadelkopf-Antrieb	Needle head drive	KW	3,7	3,7	3,7	3,7	3,7	3,7
Bandvorschub	Belt advance	KW	0,25	0,25	0,25	0,25	0,25	0,25
Lakepumpe	Brine pump	KW	5,5	5,5	5,5	5,5	5,5	5,5
Primärspannung	Voltage	V/Hz	400 / 50	400 / 50	400 / 50	400 / 50	400 / 50	400 / 50
Benötigte Absicherung	Fuses	A / amps	25	25	25	25	25	25
Druckluftanschluss	Air pressure connection	bar	6 - 10	6 - 10	6 - 10	6 - 10	6 - 10	6 - 10
Luftverbrauch max.	Max. air requirement	Lt./min.	35	35	35	35	35	35
Nettogewicht	Net weight	kg	820	820	825	920	920	920
Bruttogewicht (seemässig verpackt)	Gross weight, with seaworthy crating	kg	900	900	905	1000	1000	1000
Abmessungen, Verpackung (L x B x H)	Dimensions (packed)	cm	214 x 100 x 210	214 x 100 x 210	214 x 100 x 210	214 x 100 x 210	214 x 100 x 210	214 x 100 x 210

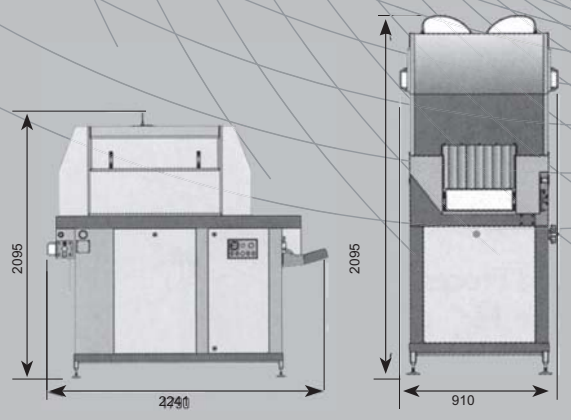

Händler / Kontaktadresse Distributor / Contact address: